


Epoxy Table Installation Instructions

PLEASE READ THIS MANUAL THOROUGHLY BEFORE USING THIS APPLIANCE



Round Table

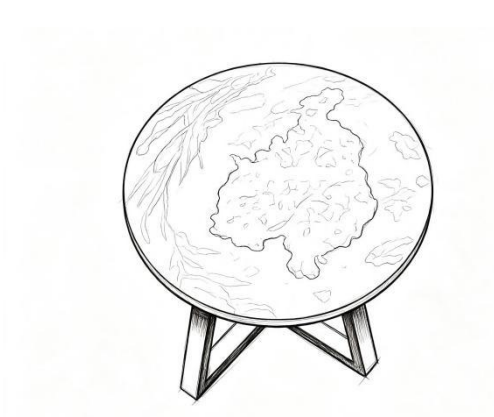

Rectangular Table





Oval Table

Dear Customer:

Thank you for purchasing our resin table, please note the following points during installation:

1. Before installation, lay carpets: cotton cloth or other fabrics on the floor to prevent scratches to the floor or the product.
2. Only adults are allowed to install - please remove all children from the area

Table Leg LTL-05 Installation Steps:

	Leveler	M8 Bolt	Self-tapping Screw	Allen key
x2	 x7	 x4	 x10	 x1

step 1: Assemble the table legs.

step 2: Install the adjustable levelers. Then, adjust the levelers until three of them are firmly touching the ground for proper stability.

step 3: Secure tabletop

Lay a soft cloth on the floor, then set your resin tabletop upside - down on top of the cloth to avoid scratches. Use 6 self-tapping screws through the pre-drilled holes in the mounting plate and drill them into the underside of the tabletop to securely fasten the tabletop to the table legs.

Note: Important: Keep equal distance on both sides for symmetric installation.

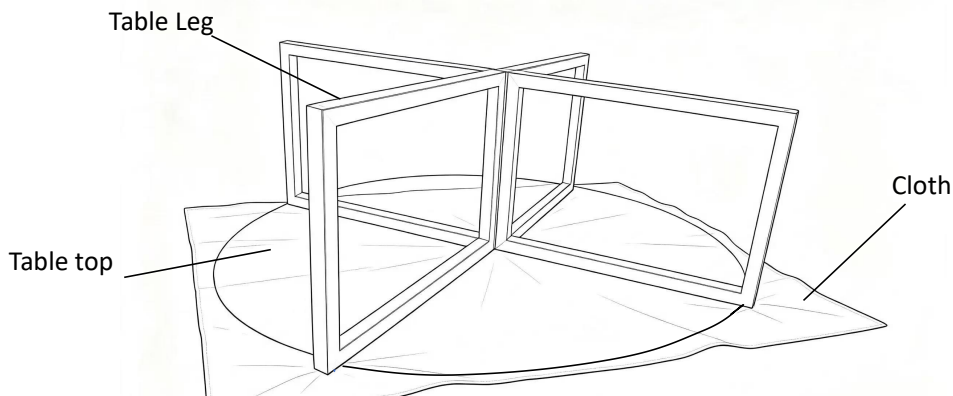
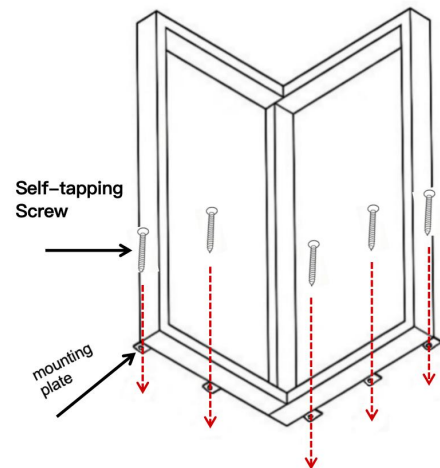
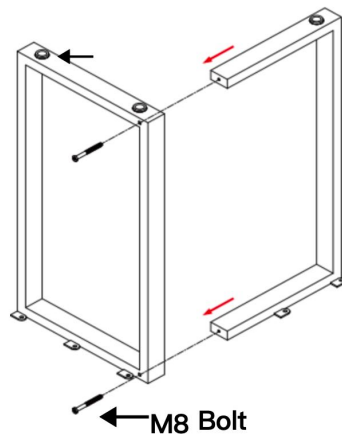



Table Leg TTL-06 Installation Steps:

	Leveler  x7	M8 Bolt  x4	Self-tapping Screw  x12	Allen key  x1
---	--	--	--	---

step 1: Assemble the table legs.

step 2: Install the adjustable levelers. Then, adjust the levelers until three of them are firmly touching the ground for proper stability.

step 3: Secure tabletop

Lay a soft cloth on the floor, then set your resin tabletop upside - down on top of the cloth to avoid scratches. Use 6 self-tapping screws through the pre-drilled holes in the mounting plate and drill them into the underside of the tabletop to securely fasten the tabletop to the table legs.

Note: Important; Keep equal distance on both sides for symmetric installation.

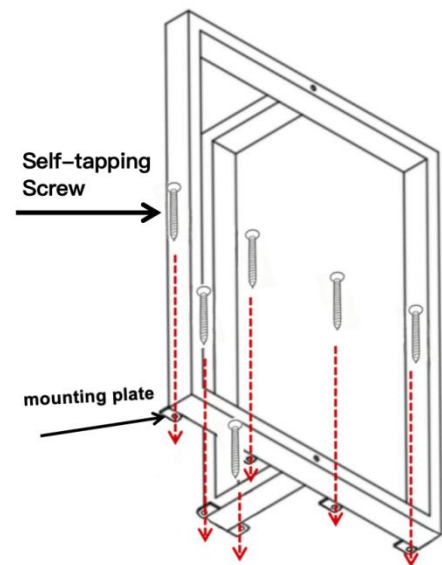
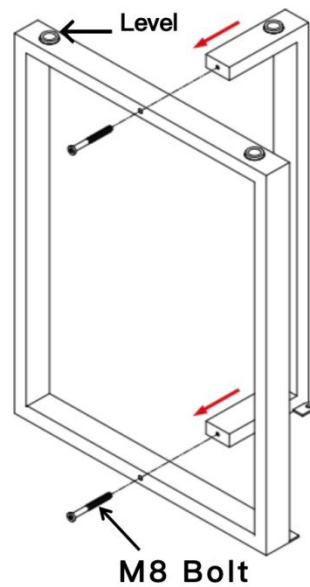


Table Leg VTL-01 Installation Steps:

	Leveler  x5	Self-tapping screw  x12
---	--	--

step 1: Install the adjustable levelers.

step 2: Adjust the levelers until two of them are firmly touching the ground for proper stability.

step 3: Secure tabletop

Lay a soft cloth on the floor, then set your resin tabletop upside - down on top of the cloth to avoid scratches. Use 6 self-tapping screws through the pre-drilled holes in the mounting plate and drill them into the underside of the tabletop to securely fasten the tabletop to the table legs.

Note: Important; Keep equal distance on both sides for symmetric installation,

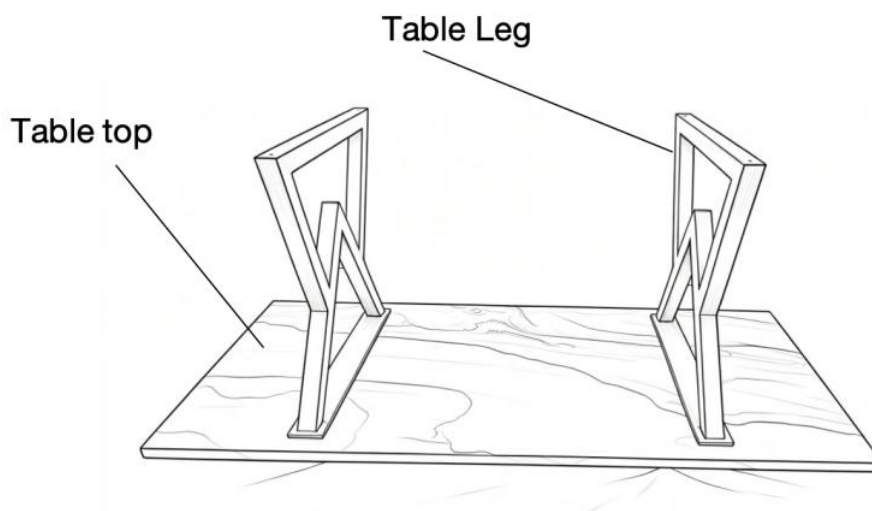
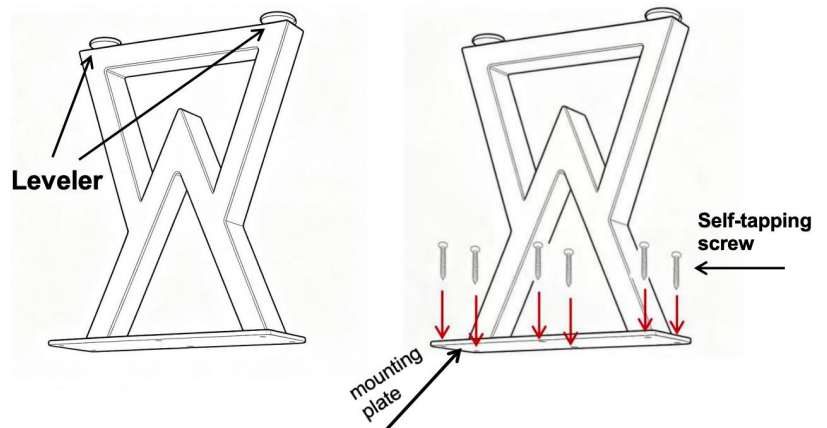


Table Leg STL-08 Installation Steps:

	Leveler  x5	Self-tapping screw  x16
---	--	--

step 1: Install the adjustable levelers.

step 2: Adjust the levelers until two of them are firmly touching the ground for proper stability.

step 3: Secure tabletop

Lay a soft cloth on the floor, then set your resin tabletop upside - down on top of the cloth to avoid scratches. Use 8 self-tapping screws through the pre-drilled holes in the mounting plate and drill them into the underside of the tabletop to securely fasten the tabletop to the table legs.

Note: Important: Keep equal distance on both sides for symmetric installation.





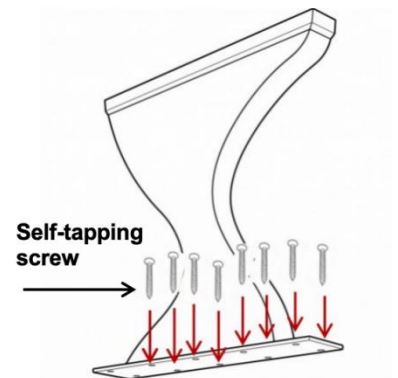


Table Leg **MTL-04** Installation Steps:

	Leveler 	M6 screw 	suction cup 	Allen key 
x4	x5	x10	x4	x1


Step 1: Align & interlock two U- shaped leg frames

Take two U-shaped metal frames. Line up their middle grooves, slot them together in cross shape, make all central mounting holes perfectly aligned.

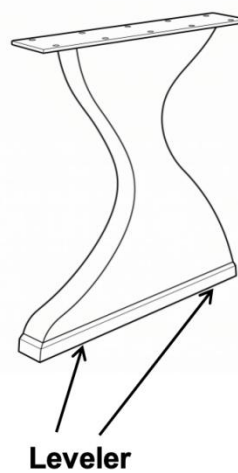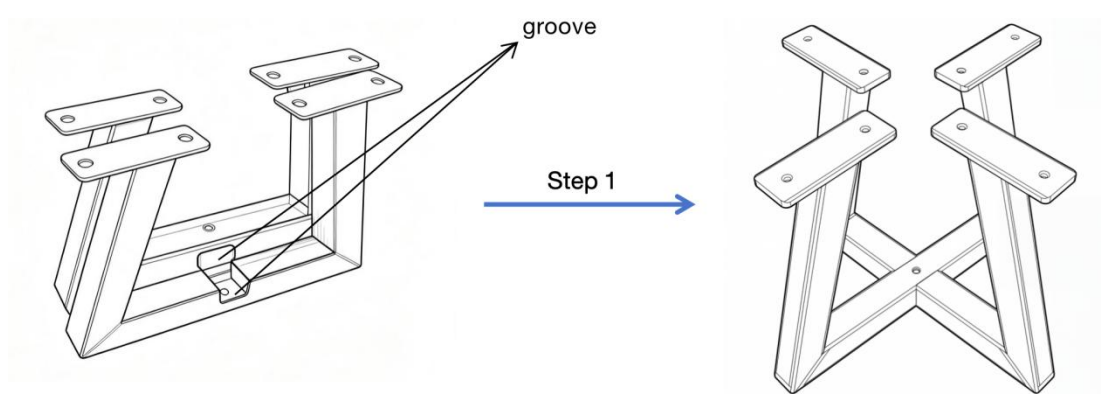


Step 2: Insert and fully fasten central M6 screw

Pass one M6 screw through overlapped center holes. Manually adjust the frames into a regular cross structure, confirm four leg bottoms sit evenly without tilt. Then use the supplied hex- key wrench to fully tighten the M6 screw for a firm, wobble- free joint.

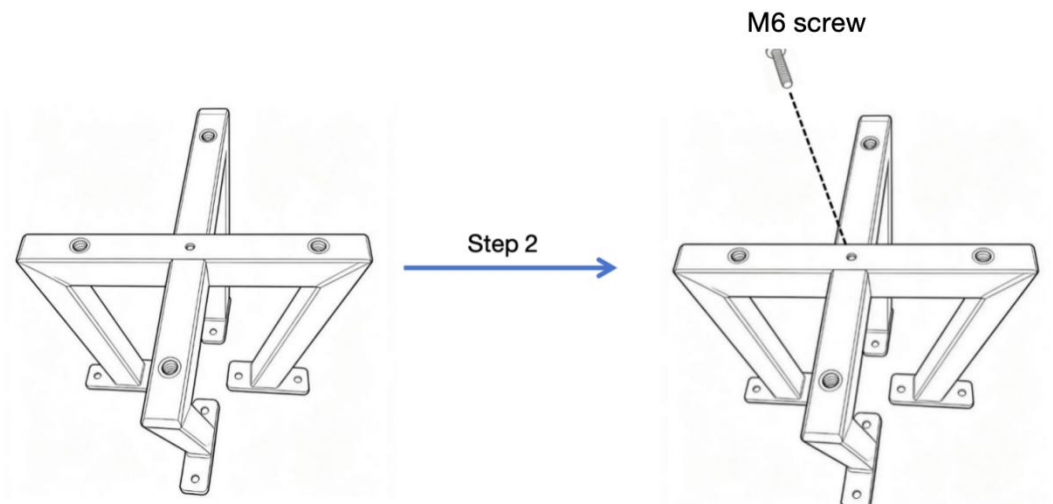


Step 3: Install levelers (optional)

Screw levelers into threaded holes at base. Rotate levelers to reduce wobble and stabilize the whole base on floor.

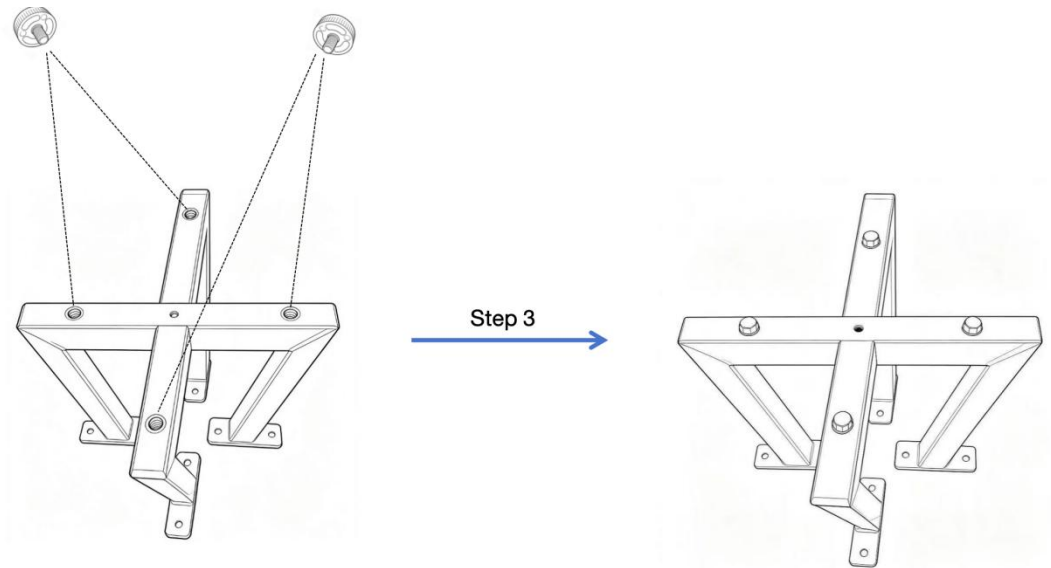


Step 4: Assemble upper X- shaped frame

Take two long bars, interlock them via matching grooves to form an X- shaped frame. Align center holes and secure joint with M6 screws.

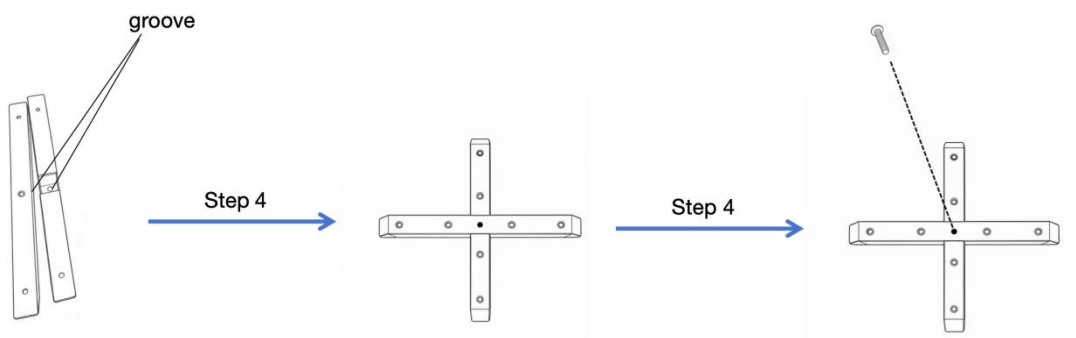

Step 5: Connect U- shaped base to X- shaped frame

Line up 8 pre - drilled holes on assembled U- shaped base with holes on X-frame. Fasten together with M6 screws to form one complete whole table base.

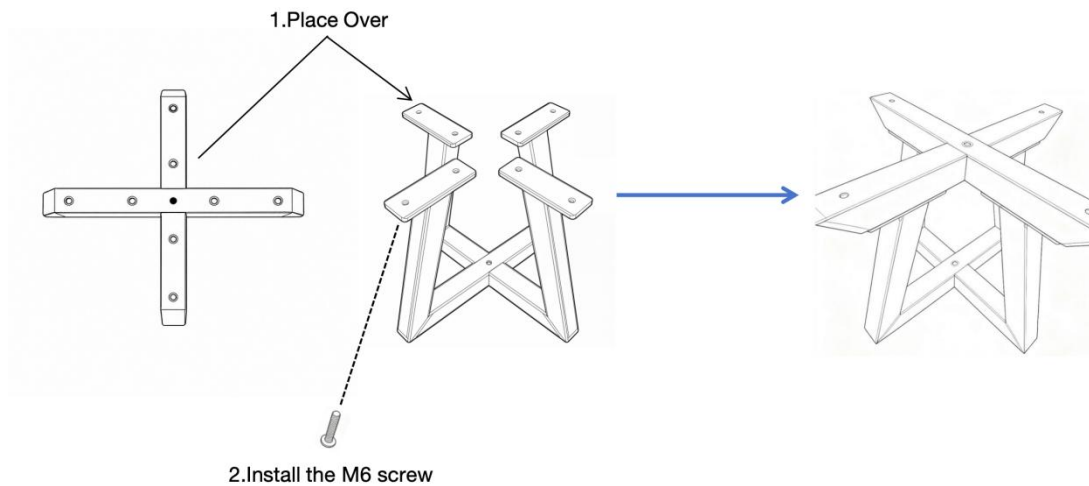

Step 6: Secure tabletop

First, screw the glass suction cups into the four holes on the X- shaped frame. Lay a soft cloth on the floor, then set your resin tabletop upside- down on top of the cloth to avoid scratches. Place the fully- assembled table base (with suction cups already attached) onto the tabletop. Let the suction cups lock in place, and your installation is finished.

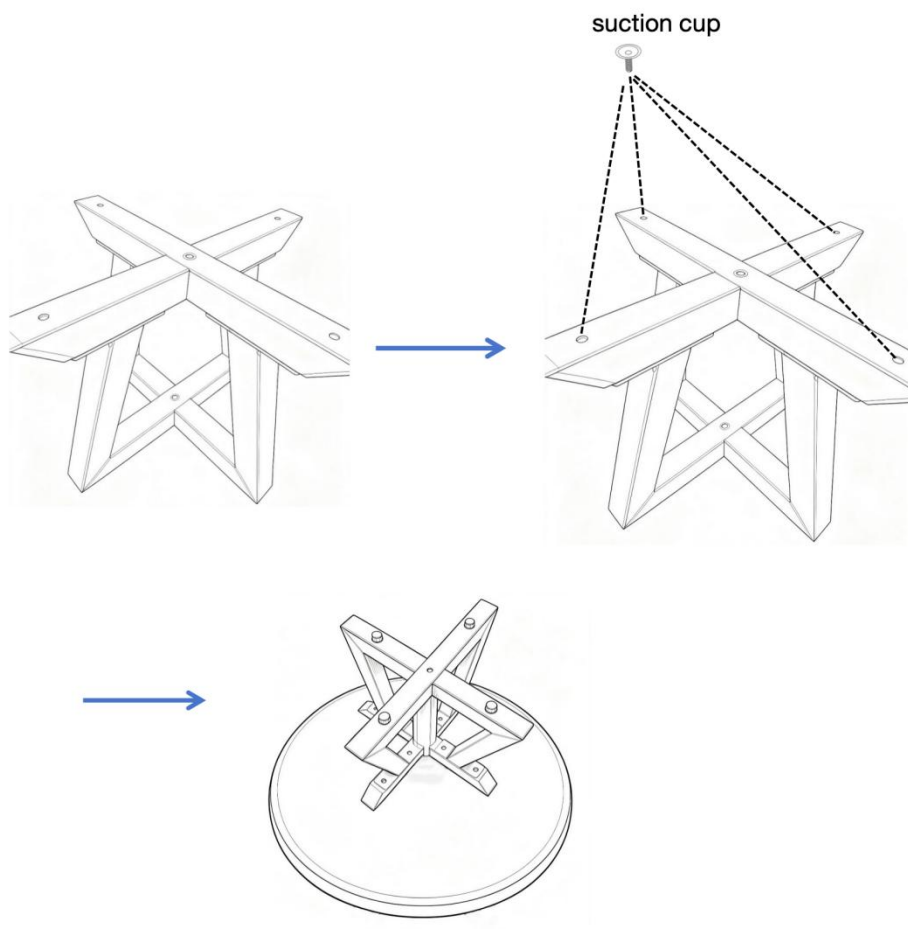



Table Leg XTL-28 Installation Steps:

	Leveler  x5	M6 screw  x8	Suction Cup  x4	Allen key  x1
---	--	---	---	--

Step 1: Attach first V- shaped frame to X-shaped frame

Take one V-shaped frame. Keep the tray style side facing upward. Align it with the four pre-drilled holes on left side of X-shaped frame, fasten with M6 screws.

Step 2: Attach second V- shaped frame to X-shaped frame

Take the other V-shaped frame, also keep its tray style side facing upward. Align with holes on right side of X-shaped frame, secure using M6 screws.

Important: The tray side with mounting holes on both X-shaped and V-shaped frames must face upward. A complete whole table base will be formed after assembly.


Step 3: Install levelers

Screw levelers into threaded holes at base. Rotate levelers to reduce wobble and stabilize the whole base on floor.

Step 4: Secure tabletop

First, screw the glass suction cups into the four holes on the mounting plate. Lay a soft cloth on the floor, then set your resin tabletop upside- down on top of the cloth to avoid scratches.

Place the fully- assembled table base (with suction cups already attached) onto the tabletop. Let the suction cups lock in place, and your installation is finished.

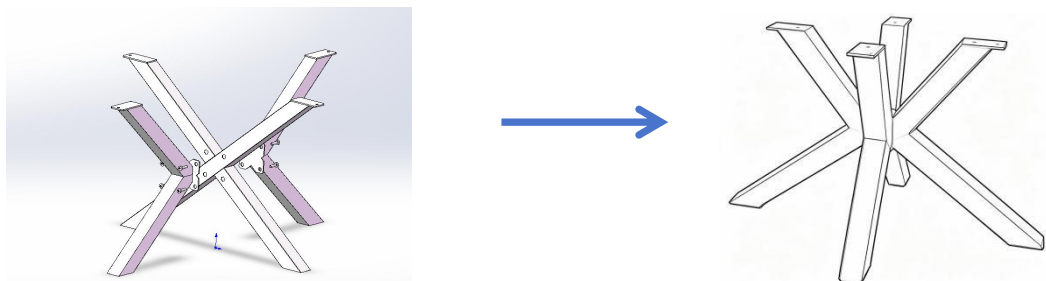

Acrylic Table Legs T-Shape TTL-08

Position the table legs approximately 9 inches in from each end of the tabletop. Once the legs are properly positioned, keep them in place. With two people, carefully lift and lower the tabletop onto the legs, making sure not to move the legs during placement.



Acrylic Table Legs T-Shape TTL-57

Position the table legs approximately 9 inches in from each end of the tabletop. Once the legs are properly positioned, keep them in place. With two people, carefully lift and lower the tabletop onto the legs, making sure not to move the legs during placement.

