

Epoxy Table Installation Instructions

PLEASE READ THIS MANUAL THOROUGHLY BEFORE USING THIS
APPLIANCE



Round Table

Table Leg LTL-05 Installation Steps:

	Leveler	M8 Bolt	Self-tapping Screw	Allen key
x2	 x7	 x4	 x10	 x1

step 1: Assemble the table legs.

step 2: Install the adjustable levelers. Then, adjust the levelers until three of them are firmly touching the ground for proper stability.

step 3: Secure tabletop

Lay a soft cloth on the floor, then set your resin tabletop upside - down on top of the cloth to avoid scratches. Use 6 self-tapping screws through the pre-drilled holes in the mounting plate and drill them into the underside of the tabletop to securely fasten the tabletop to the table legs.

Note: Important: Keep equal distance on both sides for symmetric installation.





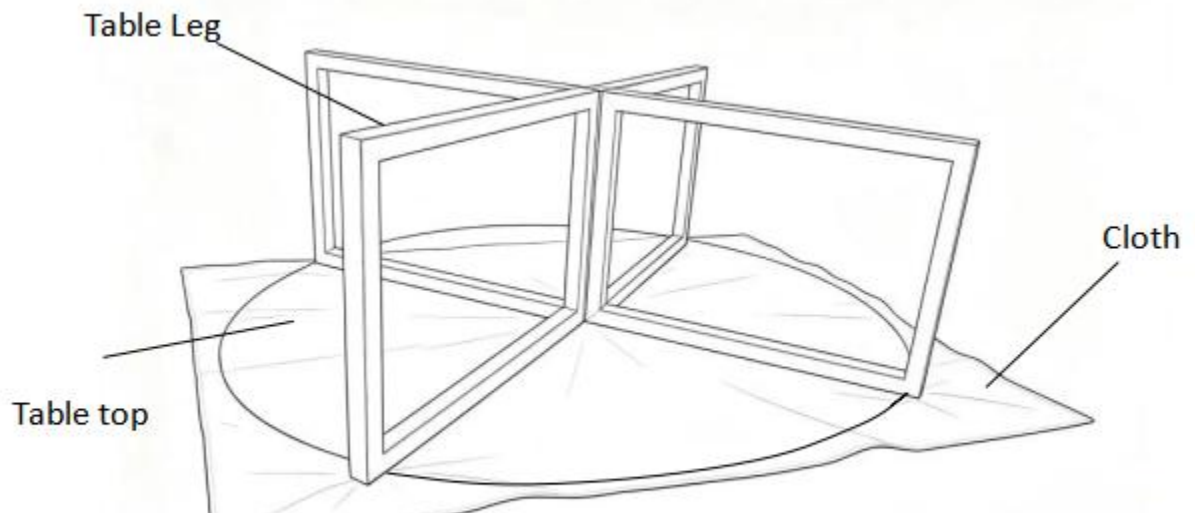


Table Leg **MTL-04** Installation Steps:

	Leveler 	M6 screw 	suction cup 	Allen key 
x4	x5	x10	x4	x1


Step 1: Align & interlock two U- shaped leg frames

Take two U-shaped metal frames. Line up their middle grooves, slot them together in cross shape, make all central mounting holes perfectly aligned.

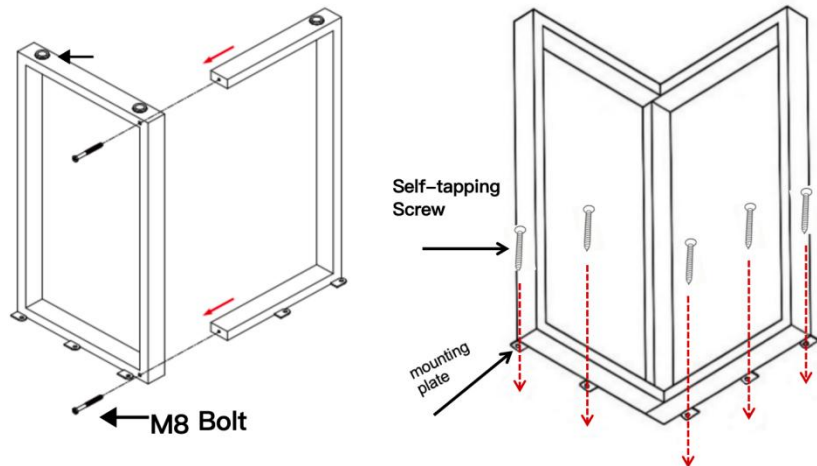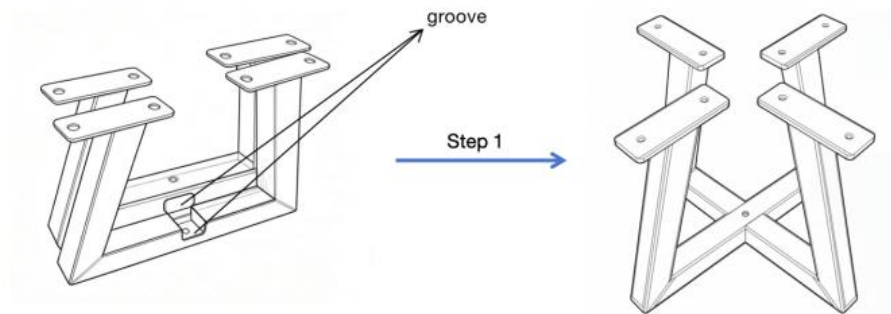


Step 2: Insert and fully fasten central M6 screw

Pass one M6 screw through overlapped center holes. Manually adjust the frames into a regular cross structure, confirm four leg bottoms sit evenly without tilt. Then use the supplied hex- key wrench to fully tighten the M6 screw for a firm, wobble- free joint.

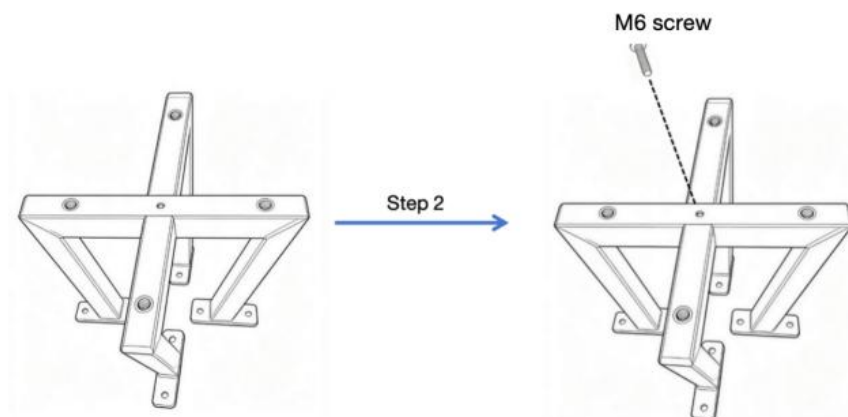


Step 3: Install levelers (optional)

Screw levelers into threaded holes at base. Rotate levelers to reduce wobble and stabilize the whole base on floor.

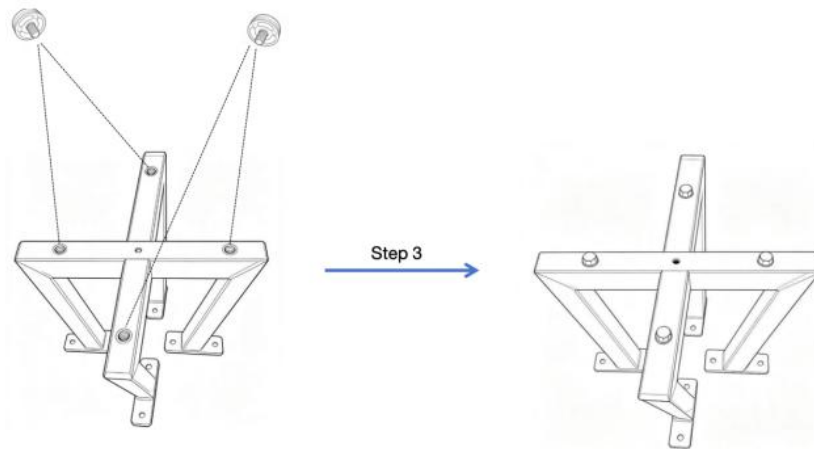


Step 4: Assemble upper X- shaped frame

Take two long bars, interlock them via matching grooves to form an X- shaped frame. Align center holes and secure joint with M6 screws.

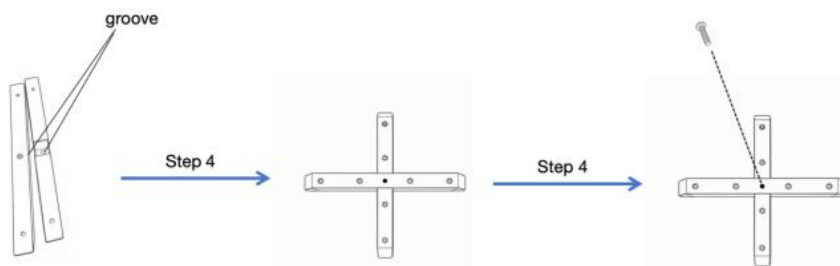

Step 5: Connect U- shaped base to X- shaped frame

Line up 8 pre - drilled holes on assembled U- shaped base with holes on X-frame. Fasten together with M6 screws to form one complete whole table base.

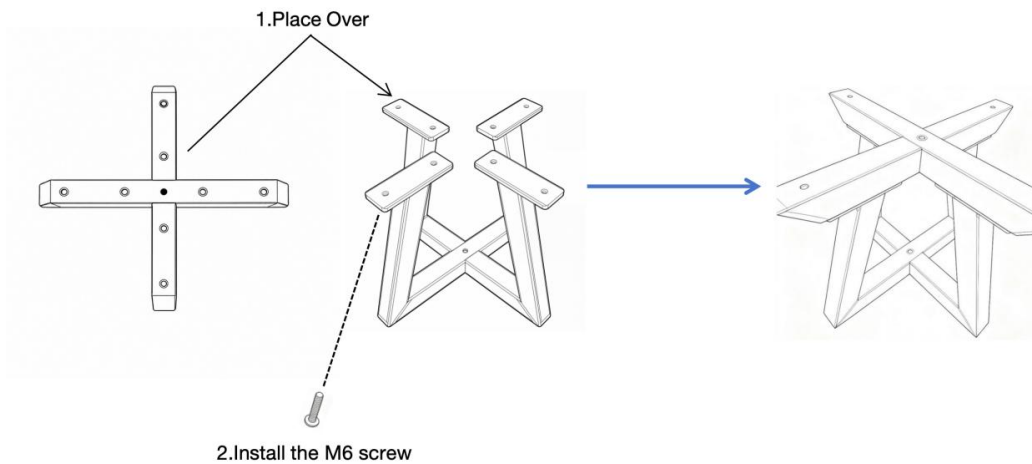

Step 6: Secure tabletop

First, screw the glass suction cups into the four holes on the X- shaped frame. Lay a soft cloth on the floor, then set your resin tabletop upside- down on top of the cloth to avoid scratches. Place the fully- assembled table base (with suction cups already attached) onto the tabletop. Let the suction cups lock in place, and your installation is finished.

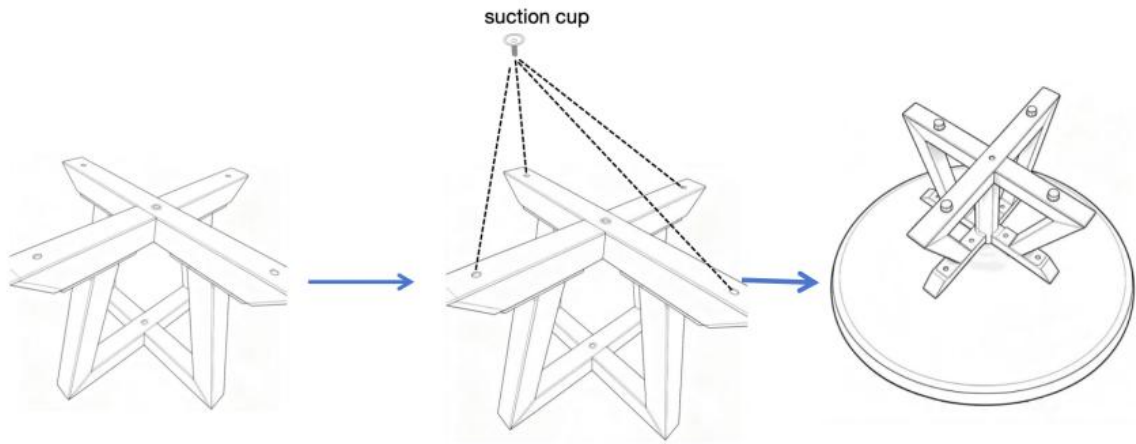




Table Leg XTL-28 Installation Steps:

	Leveler	M6 screw	Suction Cup	Allen key
	 x5	 x8	 x4	 x1

Step 1: Attach first V- shaped frame to X-shaped frame

Take one V-shaped frame. Keep the tray style side facing upward. Align it with the four pre-drilled holes on left side of X-shaped frame, fasten with M6 screws.

Step 2: Attach second V- shaped frame to X-shaped frame

Take the other V-shaped frame, also keep its tray style side facing upward. Align with holes on right side of X-shaped frame, secure using M6 screws.

Important: The tray side with mounting holes on both X-shaped and V-shaped frames must face upward. A complete whole table base will be formed after assembly.

Step 3: Install levelers

Screw levelers into threaded holes at base. Rotate levelers to reduce wobble and stabilize the whole base on floor.

Step 4: Secure tabletop

First, screw the glass suction cups into the four holes on the mounting plate. Lay a soft cloth on the floor, then set your resin tabletop upside- down on top of the cloth to avoid scratches. Place the fully- assembled table base (with suction cups already attached) onto the tabletop. Let the suction cups lock in place, and your installation is finished.

